

Information Sheet # 13


Protected Above-Ground Tanks for Flammable and Combustible Liquids Covered by UL 2085

Your Reliable Guide for Generator Maintenance

We note an emerging trend towards UL2085 for above-ground generator fuel tanks with secondary containment. Stringent EPA controls on Underground Storage Tanks (UST's), and larger penalties for ground contamination, have led to much greater usage of Above-Ground Storage Tanks (AST's). However, once above ground in addition to environmental factors we have to consider the safe use and storage of flammable fuels.

The illustration below shows a typical design for a "beside installation" vaulted fuel tank. Other forms of vaulted tanks to UL 2085 permit the generator set to be mounted above the tank. Above 500 gallons, many cities specify these tanks and in most cases NFPA 37 requires extra precautions above 500 gallons.

Diagram of Fuel Tank to UL 2085

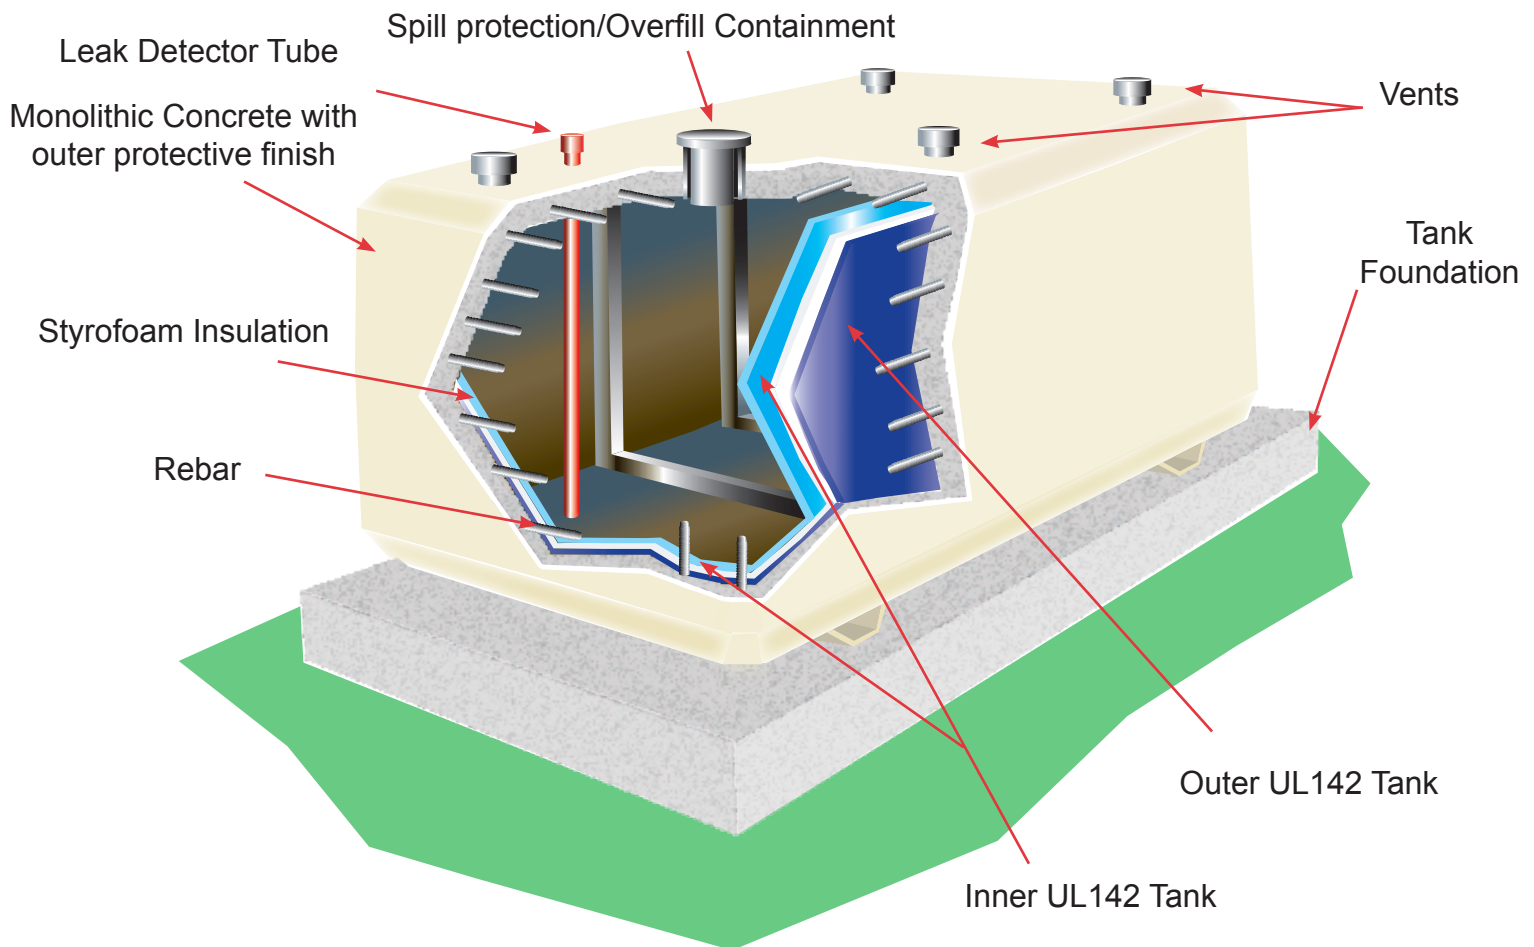

To fulfill our commitment to be the leading supplier in the power generation industry, the Loftin Equipment and Bay City Electric Works teams ensures they are always up-to-date with the current power industry standards as well as industry trends. As a service, our **Information Sheets** are circulated on a regular basis to existing and potential power customers to maintain their awareness of changes and developments in standards, codes and technology within the power industry.

Fire departments are demonstrating a keen preference for this type of tank, and we foresee this as the standard tank for the future.

Key safety factors and codes to be considered in fuel tank design are:

- Ability to Withstand Fire (UL 2085 Section 17)
- Vehicle Impact Resistance (UL 2085 Section 20)
- Projectile Resistance (UL 2085 Section 21)

In addition to UL standards, fuel tanks also have to meet all NFPA Fire Code requirements.

The information in this sheet gives details of the designs Fuel Tank manufacturers are using to meet the dictates of UL 2085, UL142, NFPA 30, 37, and 110, and address the safety factors listed above.

Manufacturers have taken the concept of the UL142 double-walled fuel tanks, and achieved compliance to UL 2085 by a combination of rigid design, stronger carbon steel materials, and insulation between outside and inside containment walls.

These additional features give the fuel tank the ability to:

- Withstand fire:** With 2-hour liquid pool and furnace fire tests, the primary internal tank sees on average a temperature rise of no more than 260° F
- Resist Vehicle Impact:** Maintain fuel containment after an impact of 12,000 lbs force @ 10mph
- Resist Projectiles :** One manufacturer quotes a test with 150-grain, 30-caliber bullet, muzzle velocity 2,700 feet per sec. from 100’.

Useful Web-Sites for further information:

Underwriters Laboratory: <http://ulstandardsinfontet.ul.com/scopes/scopes.asp?fn=2085.html>
NFPA www.nfpa.org

Our technical support team will be very happy to discuss specific needs with you, and provide you with further information and details of all available options to satisfy the requirements of UL 2085 and any other questions concerning your power needs.



Bay City Main Office - San Diego
13625 Danielson Street
Poway, CA 92064
Toll Free: 866.938.8200
Fax: 619.938.8202

service@bcew.com

Greater LA Area Sales and Service Center
860 Lawson Street
City of Industry, CA 91748
Toll Free: 866.938.8200
Fax: 619.938.8216

San Francisco Area Service Center
322 Lindbergh Avenue
Livermore, CA 94551
Toll Free: 866.938.8200
Fax: 619.938.8216

www.bcew.com



www.loftinequip.com
service@loftinequip.com

Corporate Headquarters
2111 E. Highland Ave. Ste. 255
Phoenix, AZ 85016
Phone: (602) 272-9466
Fx: 602.272.7582
Toll-Free: 800-437-4376

Parts & Service- Phoenix
12 N. 45th Ave.
Phoenix, AZ 85043
Phone: (602) 272-9466
Toll-Free: 800-437-4376

San Antonio/Austin
1241 Universal City Blvd.
Universal City, TX 78148
Phone: (210) 881-1623 (San Antonio)
Phone: (512) 464-1890 (Austin)
Fax: (210) 881-2143
Toll-free: 866-441-0375

Dallas/Fort Worth
5204 Bear Creek Court
Irving, TX 75061
Phone: (214) 237-4566
Fax: (469) 359-60188

Houston
6113 Brittmoore Rd.
Houston, TX 77041
Phone: (281) 310-6858
Toll-Free: 800-822-3078
Fax: (281) 310-6865

Las Vegas
701 N. Green Valley Pkwy. STE 200
Henderson, NV 89074
Phone: (702) 399-7595
Fax: (702) 399-7457